


ES 4

4" Monoblock Deep Well Pumps




- Monoblock pumps for 4" wells
- Maximum liquid temperature: 35 °C
- Brass made turbine impeller
- Built-in non-return valve
- Supplied with 25 m round cable and common control box
- Maximum immersion depth: 20 m
- Protection Grade IP68
- Insulation Class B
- Maximum permissible starts per hour: 20 (at regular intervals)
- Oil cooled motor with compensating diaphragm
- Graphite mechanical seal protected by sand proof ring
- All ports are none-toxic and non-polluting
- Shaft and jacket are made by stainless steel
- Outlet is made by brass

APPLICATIONS

- Pumping clean water into: detached houses-country houses and farms, cottages
- Moving water in fountains
- Rain irrigation
- Feeding pressure systems
- Filling and emptying tanks
- Water supply

ES 4

4" Monoblock Deep Well Pumps

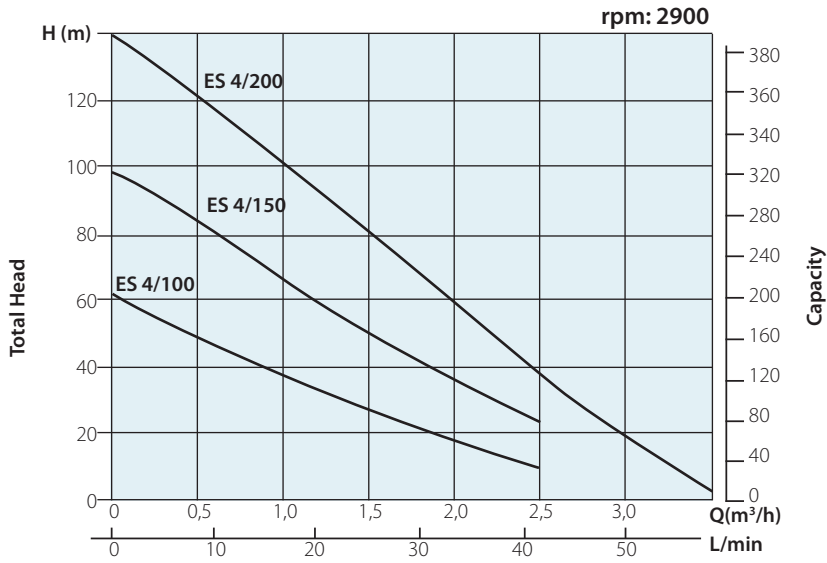

| Type Single Phase | P2 | | 1 Ph 230 V | | Capacitor | | Outlet | l/min Q m³/h | 0 | 0,5 | 1 | 1,5 | 2 | 2,5 | Length mm | Weight kg |
|----------------------|------|-----|------------|----|-----------|----|--------|-----------------|-----|-----|----|-----|----|-----|--------------|--------------|
| | kW | HP | A | μF | V | 0 | | | 8 | 16 | 25 | 33 | 41 | | | |
| ES 4 / 100 | 0,75 | 1 | 6 | 35 | 450 | 1" | H m | 61 | 50 | 39 | 30 | 19 | 10 | 485 | 15 | |
| ES 4 / 150 | 1,1 | 1,5 | 6 | 40 | 450 | 1" | | 99 | 83 | 68 | 54 | 38 | 22 | 552 | 18 | |
| ES 4 / 200 | 1,5 | 2 | 6 | 45 | 450 | 1" | | 140 | 120 | 100 | 81 | 60 | 37 | 606 | 22 | |